



HD 2205.2 BENCH-TOP pH METER

The **HD2205.2** is a bench top instruments for electrochemical measures: **pH** and **temperature**. It is fitted with a large backlit LCD display.

The **HD2205.2** is equipped with two BNC inputs for the measurement of **pH**, **mV**, **redox potential** (ORP) with pH or redox electrodes, or electrodes with separate reference, and one input for combined pH/temperature probes fitted with SICRAM module.

AI models are fitted with input for the measurement of **temperature** with Pt100 or Pt1000 immersion, penetration or contact probes. The temperature probes are equipped with an automatic recognition module and factory calibration data are stored inside.

The pH electrode calibration can be carried out on one or five points and the calibration sequence can be chosen from a list of 13 buffers.

- The pH electrode calibration can be carried out on one or five points and the calibration sequence can be chosen from a list of 13 buffers. Temperature compensation can be automatic or manual.

The data can be transferred from the instrument connected to a PC via the multi-standard RS232C serial port and USB 2.0. The storing parameters can be configured using the menu. The RS232C serial port can be used to transfer the acquired measurements to a 24 column portable printer in real time (HD40.1 or HD40.2).

The instruments equipped with **HD22BT** (Bluetooth) option can transfer data without any connection to a PC or printer fitted with Bluetooth input or through Bluetooth/RS232C converter. The software DeltaLog11 allows instrument management and configuration, and data processing on PC.

The instruments have **IP66** protection degree.

Technical characteristics HD2205.2

pH - mV - °C - °F measurement

Instrument

Dimensions (Length x Width x Height) 265x185x70mm

Weight 490g

Materials ABS, rubber

Display Back lighted, matrix point display.
240x64 points, visible area: 128x35mm

Operating conditions

Working temperature -5 ... 50°C

Storing temperature -25 ... 65°C

Working relative humidity 0 ... 90% R.H. without condensate

Protection degree IP66

Power

Mains adapter (cod. SWD10)

12Vdc/1A

For supplying of electrode holder with built-in stirrer
HD22.2

Security of memorized data

Unlimited

Time

Date and hour


Real time schedule with backup battery E 3.6V -
1/2AA

Accuracy 1min/month max drift

Measured values storing

2000 screens

Storage interval 1s ... 999s

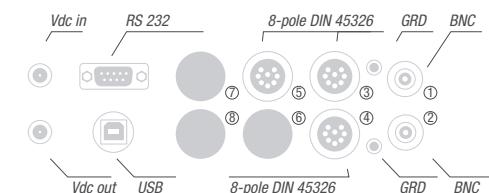

Calibration storage

Quantity Last 8 calibrations of each physical quantity

RS232C serial interface

Type RS232C electrically isolated
Baud rate Can be set from 1200 to 115200 baud
Data bit 8
Parity None
Stop bit 1
Flow Control Xon/Xoff
Length of serial cable Max 15m

USB Interface

Type 1.1 - 2.0 electrically isolated
Bluetooth Interface HD22BT optional

EMC standard regulations

Security EN61000-4-2, EN61010-1 level 3
Electrostatic discharge EN61000-4-2 level 3
Electric fast transients EN61000-4-4 level 3
EN61000-4-5 level 3
Voltage variations EN61000-4-11
Electromagnetic interference susceptibility IEC1000-4-3
Electromagnetic interference emission EN55020 class B

Connections

Input for temperature probes with SICRAM module^⑤ 8-pole male DIN45326 connector
Inputs pH/mV ① - ② female BNC
Inputs for SICRAM module pH/temperature ③ a. ④ 8-pole male DIN45326 connector
Serial interface DB9 connector (9-pole male)
USB interface USB connector type B
Bluetooth Optional
Mains adapter 2-pole connector (Ø5.5mm-2.1mm).
Positive at centre.
2-pole connector (Ø5.5mm-2.1mm).
Positive at centre (output 12Vdc/200mA max).

Measurement of pH by instrument

Measuring range -9.999...+19.999pH
Resolution 0.01 o 0.001pH selectable from menu
Accuracy ±0.001pH ±1digit
Input impedance >10¹²Ω
Calibration error @25°C |Offset| > 20mV
Slope > 63mV/pH o Slope < 50mV/pH
Sensitivity > 106.5% or Sensitivity < 85%
Up to 5 points from a list of 13 automatically detected buffers.
Automatically detected pH standard solutions (@25°C) 1.679pH - 2.000pH - 4.000pH - 4.008pH - 4.010pH
6.860pH - 6.865pH - 7.000pH - 7.413pH - 7.648pH
9.180pH - 9.210pH - 10.010pH

Measurement of mV by instrument

Measuring range -1999.9...+1999.9mV
Resolution 0.1mV
Accuracy ±0.1mV ±1digit
Drift after 1 year 0.5mV/year

Measurement of temperature by instrument

Pt100 Measuring range -50...+150°C
Pt1000 Measuring range -50...+150°C
Resolution 0.1°C
Accuracy ±0.1°C ±1digit
Drift after 1 year 0.1°C/year

ORDERING CODES

HD2205.2: The kit is composed of: instrument HD2205.2 for measurement of pH - redox - temperature, **datalogger**, stabilized power supply at mains voltage 100-240Vac/12Vdc-1A, instructions manual and software DeltaLog11.

pH/mV electrodes, conductivity probes, dissolved oxygen probes, temperature probes, standard reference solutions for different measurement types, connection cables for pH electrodes with S7 connector, cables for data download to PC or printer have to be ordered separately.

ACCESSORIES

9CPRS232: Connection cable SubD female 9-pole for serial output RS232C.

CP22: USB 2.0 connection cable - connector type A - connector type B.

DeltaLog11: Software for download and management of the data on PC using Windows 98 to Vista operating systems.

SWD10: Stabilized power supply at 100-240Vac/12Vdc-1A mains voltage.

HD40.1: 24-column portable thermal printer, serial interface, 57mm paper width, four NiMH 1.2V rechargeable batteries, SWD10 power supply, instruction manual, 5 thermal paper rolls.

HD40.2: 24-column portable thermal printer, **Bluetooth and serial interface**, 57mm paper width, four NiMH 1.2V rechargeable batteries, SWD10 power supply, instruction manual, 5 thermal paper rolls. Requires the module HD22BT (**optional**) or the cable HD 2110 CSNM (**optional**).

HD2110CSP: Connection cable for instruments series HD34... to printer **S'print-BT**

HD22.2: Laboratory electrode holder composed of basis plate with incorporated magnetic stirrer, staff and replaceable electrode holder. Height max. 380mm. Powerd by bench-top meters of the series HD22... with cable HD22.2.1 (**optional**) or supplier SWD10 (**optional**).

HD22.3: Laboratory electrode holder with metal basis plate. Flexible electrode holder for free positioning. For Ø 12mm probes.

HD22BT: Bluetooth module for wireless data transmission from instrument to PC. **The fitting of the module into the instrument is made exclusively by Delta Ohm, at the time of placing the order.**

TP47: Module for the connection of Pt100 4-wire and Pt1000 2-wire probes.



HD40.1



pH



mV

pH electrodes without SICRAM module (Inputs ① and ②)**KP20:** Combined pH electrode for general use, gel filled with screw connector S7 body in Epoxy.**KP30:** Combined pH electrode for general use, cable 1 m, gel filled, body in Epoxy.**KP50:** Combined pH electrode with Teflon collar diaphragm, for emulsions, deionised water, S7 screw connector, gel filled, body in glass.**KP 61:** Combined pH electrode, 3 diaphragms for milk, cream, etc. Liquid reference filling, with screw connector S7, body in glass.**KP 62:** Combined pH electrode, 1 diaphragm for pure water, paints, etc. gel-filled, with screw connector S7, body in glass.**KP 63:** Combined pH electrode for general use, varnish, cable 1 m, electrolyte KCl 3M body in glass.**KP 64:** Combined pH electrode for water, varnish, emulsions, etc., electrolyte KCl 3M with screw connector S7, body in glass.**KP 70:** Combined pH micro electrode diam. 4.5 x L=25 mm. Gel filled, with screw connector, body in glass.**KP 80:** Combined pointed pH electrode, gel filled, with screw connector S7, body in glass.**KP100:** Flat membrane gel combined pH electrode with S7 screw connector, glass body, for skin, leather, paper.**CP:** Extension cable 1.5m with BNC connectors on one side and S7 on the other side for electrode with S7 connector.**CP5:** Extension cable 5m with BNC connectors on one side and S7 on the other side for electrode with S7 connector.**CE:** S7 screw connector for pH electrode.**BNC:** Female BNC for electrode extension.**pH electrodes with SICRAM module (Input③)****KP63TS:** Combined pH/temperature electrode with SICRAM module, body in Epoxy, Ag/AgCl sat KCl.**SICRAM Module with BNC input for pH electrodes (Input ③)****KP47:** SICRAM module for pH electrode with BNC standard connector.**ORP Electrodes (Inputs ① and ②)****KP90:** Redox Platinum electrode, with screw connector S7, electrolyte KCl 3M, body in glass.**KP91:** Redox Platinum electrode with 1m cable, GEL filled, body in glass.**Characteristics and dimensions of the probes at page 402****pH buffer solutions****HD8642:** Buffer solution 4.01pH - 200cc.**HD8672:** Buffer solution 6.86pH - 200cc.**HD8692:** Buffer solution 9.18pH - 200cc.**Redox buffer solutions****HDR220:** Redox buffer solution 220mV 0,5 l.**HDR468:** Redox buffer solution 468mV 0,5 l.**Electrolyte solutions****KCL 3M:** 50cc ready for use solution for electrode refilling.**Cleaning and maintenance****HD62PT:** Diaphragm cleaning (tiourea in HCl) - 500ml.**HD62PP:** Protein cleaning (pepsin in HCl) - 500ml.**HD62RF:** Regeneration (fluorhydric acid) - 100ml.**HD62SC:** Solution for electrode preservation - 500ml.**Temperature probes complete with SICRAM module (Input ③)****TP87:** PT100 sensor immersion probe. Stem Ø 3 mm, length 70 mm. Cable length 1 m.**TP4721.0:** Pt100 sensor immersion probe. Stem Ø 3 mm, length 230 mm. Cable length 2 m.**TP473P.0:** Pt100 sensor penetration probe. Stem Ø 4mm, length 150 mm. Cable length 2 m.**TP474C.0:** Pt100 sensor contact probe. Stem Ø 4mm, length 230mm, contact surface Ø 5mm.

Cable length 2 m.

TP475A.0: Air probe, sensor Pt100. Stem Ø 4mm, length 230mm. Cable length 2 m.**TP4721.5:** Immersion probe, sensor Pt100. Stem Ø 6mm, length 500 mm. Cable length 2 m.**TP4721.10:** Immersion probe, sensor Pt100. Stem Ø 6mm, length 1,000mm. Cable length 2 m.**Temperature probes complete with TP47 module (input③)****TP47.100:** Direct 4 wires Pt100 sensor immersion probe. Probe's stem Ø 3mm, length 230mm. Connection cable 4 wires with connector, length 2 m.**TP47.1000:** Pt1000 sensor immersion probe. Probe's stem Ø 3mm, length 230mm. Connection cable 2 wires with connector, length 2 m.**TP87.100:** Pt100 sensor immersion probe. Probe's stem Ø 3mm, length 70mm. 4 wire connection cable with connector, length 1 m.**TP87.1000:** Pt1000 sensor immersion probe. Probe's stem Ø 3mm, length 70mm. 2-wire connection cable with connector, length 1 m.**Accessories****TP47:** Module for the connection of Pt100 4-wire and Pt1000 2-wire probes.

HD22.2